





TO SNAP IN A .156±.003 (4.0±0.08) DIA. HOLE.
1/16 (1.6) BOARD THICKNESS.



01-11

TO LOCK IN A .187±.003 (4.8±0.08) DIA. HOLE.
1/16 (1.6) BOARD THICKNESS.



01-34

TO LOCK IN A .156±.003 (4.0±0.08) DIA. HOLE.
1/16 (1.6) BOARD THICKNESS.

TO LOCK IN A .187±.003 (4.8±0.08) DIA. HOLE.
1/16 (1.6) BOARD THICKNESS.

ITEM NO.	L ± .015(0.38)	
	In.	mm
01-11-30	.187	4.8
01-11-40	.250	6.35
01-11-50	.312	7.9
01-11-60	.375	9.6
01-11-70	.437	11.1
01-11-80	.500	12.7
01-11-90	.563	14.3
01-11-100	.625	15.9
01-11-120	.750	19.1
01-11-130	.812	20.6
01-11-140	.875	22.3
01-11-160	1.00	25.4

PACKAGING : 500 PER BAG


ITEM NO.	L ± .015(0.38)	
	In.	mm
01-34-30	.187	4.8
01-34-40	.250	6.35
01-34-50	.312	7.9
01-34-60	.375	9.6
01-34-70	.437	11.1
01-34-80	.500	12.7
01-34-90	.563	14.3
01-34-100	.625	15.9
01-34-120	.750	19.1
01-34-130	.812	20.6
01-34-140	.875	22.3
01-34-160	1.00	25.4

PACKAGING : 500 PER BAG

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	R70062
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	01

NYLON 66 RATED UL94V-0 AVAILABLE UPON REQUEST
TO ORDER ADD SUFFIX "X" TO PART NUMBER

TO LOCK IN A .125±.003 (3.18± 0.08)
DIA. HOLE, 1/16 (4) PANEL THICKNESS




01-15-XXM

FURNISHED 2-UP ON BASE WITH
DOUBLE ADHESIVE TAPE

ITEM NO.	L ± .015 (0.38)	
	In.	mm
01-15-30M	.187	4.8
01-15-40M	.250	6.35
01-15-50M	.312	7.9
01-15-60M	.375	9.6
01-15-70M	.437	11.1
01-15-80M	.500	12.7
01-15-90M	.563	14.3
01-15-100M	.625	15.9

PACKAGING: 500PCS PER BAG

TO LOCK IN A .156 (4 ±0.08) DIA.
HOLE, 1/16 (1.6) PANEL THICKNESS

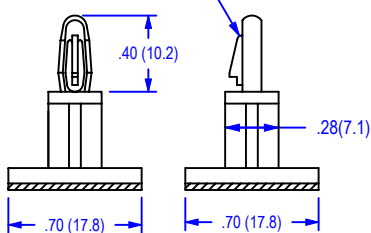

01-15-XX

FURNISHED 2-UP ON BASE WITH
DOUBLE ADHESIVE TAPE.

ITEM No	L ± .015 (0.38)	
	In.	mm
01-15-30	.187	4.8
01-15-40	.250	6.35
01-15-60	.375	9.6
01-15-80	.500	12.7
01-15-100	.625	15.9
01-15-120	.750	19.1
01-15-140	.875	22.3
01-15-160	1.00	25.4

PACKAGING: 500PCS PER BAG

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E41938
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	12

ADHESIVE	RUBBER
CARRIER	POLYETHYLENE
THICKNESS	1/32
COLOR	WHITE
UL FILE NO.	MH15436
RoHS COMPLIANCE	YES
SERVICE TEMPERATURE	0 to 150°F (-18 to 65 °C)
MR NUMBER	10

No	Revision	Date	Init.

ALL ELECTRONICS HARDWARE , INC.
2642 CORPORATE PARKWAY
ALGONQUIN, IL. 60102 1-800-778-7234

PCB SUPPORT 01-11, -15,-34

File No. 01111534CAT

11/28/05

