


01-31


TO FIT A .157 (4) Ø HOLE
.063 (1.6) BD. THICKNESS




ITEM NO	L	
	In.	mm
01-31-30	.125	3.18 (fig.1)
01-31-50	.197	5
01-31-60	.250	6.35
01-31-80	.315	8
01-31-100	.378	9.6
01-31-120	.472	12
01-31-140	.551	14
01-31-180	.709	18

TO FIT A .217 (5.5) Ø HOLE
.063 (1.6) BD. THICKNESS


figure 1

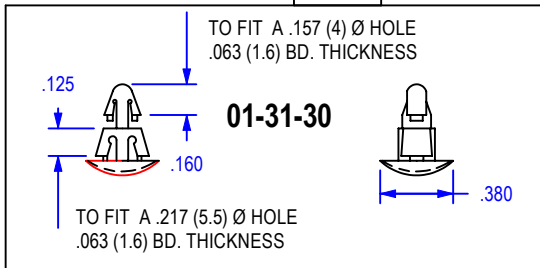

TO FIT A .125 (3.18) Ø HOLE
.070 (1.8) BOARD. THICKNESS

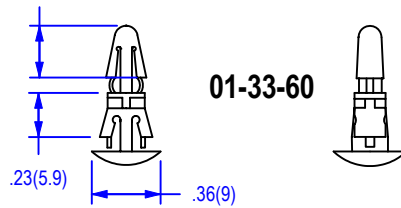


TO FIT A .202 (5.3) Ø HOLE
.070 (1.8) BD. THICKNESS

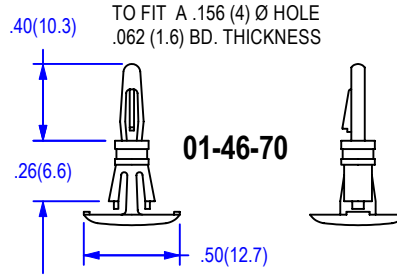


TO FIT A .212 (5.4) Ø HOLE
.062 (1.6) BD. THICKNESS

TO FIT A .156 (4) Ø HOLE
.062 (1.6) BD. THICKNESS

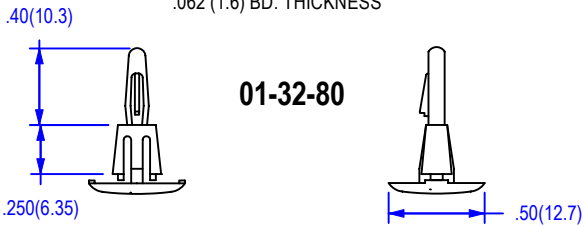


TO FIT A .216 (5.5) Ø HOLE
.070 (1.8) BD. THICKNESS

TO FIT A .156 (4) Ø HOLE
.062 (1.6) BD. THICKNESS

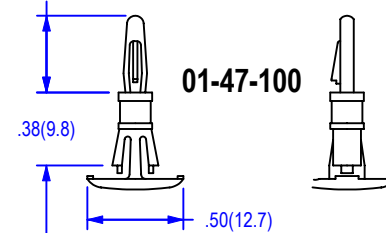


TO FIT A .212 (5.4) Ø HOLE
.070 (1.8) BD. THICKNESS

TO FIT A .156 (4) Ø HOLE
.062 (1.6) BD. THICKNESS

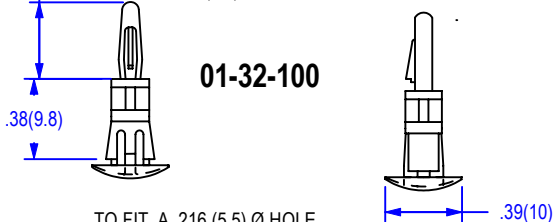

TO FIT A .216 (5.5) Ø HOLE
.070 (1.8) BD. THICKNESS

TO FIT A .156 (4) Ø HOLE
.062 (1.6) BD. THICKNESS

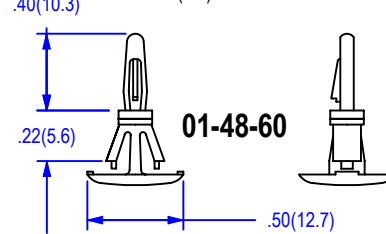

TO FIT A .250 (6.4) Ø HOLE
.070 (1.8) BD. THICKNESS

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	R70062
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	13

V-0 RATED NYLON AVAILABLE UPON REQUEST
TO ORDER ADD SUFFIX "X" TO PART NUMBER

PACKAGING: 1000 PCS PER BAG

				ALL ELECTRONICS HARDWARE, INC. 90 NORTH LIVELY BLVD. ELK GROVE VILLAGE, ILLINOIS 60007-1317 TEL.1-800-778-7234	REVERSE MOUNT PCB		
No	Revision	Date	Init.		File No.	0146cat	