
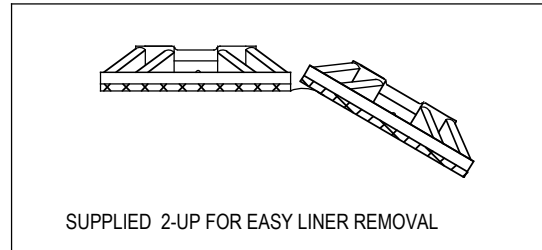
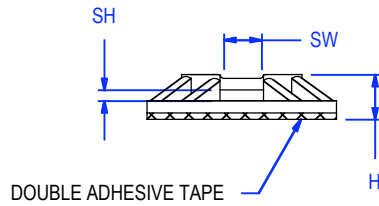


02-50 SERIES

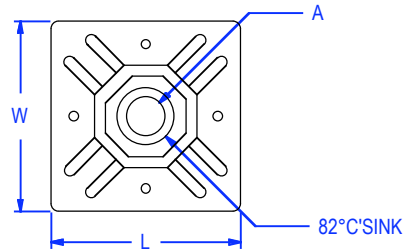

For Cable Ties rated:	ITEM NO.	ITEM NO.	L		W		A		H		Slot H		Slot W	
	Natural	Black	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm
18, 30, or 40 Lbs	02-50-758-N	02-50-758-UVB	.75	19	.75	19	.155	3.94	.23	5.9	.048	1.22	.20	5
18, 30, 40 or 50 Lbs	02-50-1008-N	02-50-1008-UVB	1.0	25.4	1.0	25.4	.212	5.38	.24	6.1	.055	1.4	.20	5

STANDARD ADHESIVE TAPE

ADHESIVE	RUBBER
CARRIER	POLYETHYLENE
THICKNESS	1/32
COLOR	WHITE
UL FILE NO.	MH15436
RoHS COMPLIANCE	YES
TEMPERATURE	32 to 167°F (0 to 75 °C)
MR NUMBER	10

NOTES:

1. PACKAGING : 500 PER BAG.
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
3. FOR OPTIONAL SCREW MOUNT USE :  
No. 4 FLAT HEAD FOR ITEM NO. 02-50-758N  
No. 6 FLAT HEAD FOR ITEM NO 02-50-1008N
4. ACRYLIC ADHESIVE AVAILABLE ON REQUEST.  
TO ORDER ADD SUFFIX "A" TO ITEM NUMBER [EXAMPLE: 02-50-758A-N]

OPTIONAL ADHESIVE TAPE. ( SEE NOTE No 4 )

ADHESIVE	ACRYLIC
CARRIER	POLYETHYLENE
THICKNESS	1/32
COLOR	WHITE
UL FILE NO.	MH15436
RoHS COMPLIANCE	YES
SERVICE TEMPERATURE	-20 to 212°F (-29 to 100 °C)
MR NUMBER	11

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E70062
COLOR	NATURAL OR BLACK
ASTM	D 4066
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	05

				BY	DATE	Title	Issue	
CUSTOMER APPROVAL				.	.	CABLE TIE HOLDER		A
VERIFIED				.	.	File No. 0250SERIES		
A	Added Acrylic tape specs & note, re-drawn on MAC.	4-6-09	FL	REVIEWED	F. Lodi	04-06-09	ALL ELECTRONICS HARDWARE, INC. 2642 CORPORATE PARKWAY ALGONQUIN, IL. 60102 1-800-778-7234	
No	Revision	Date	Init	DRAWN	F. Lodi	04-06-09	4-6-09	