




04-09-108




04-09-208




04-09-218





04-09-308



04-09-408

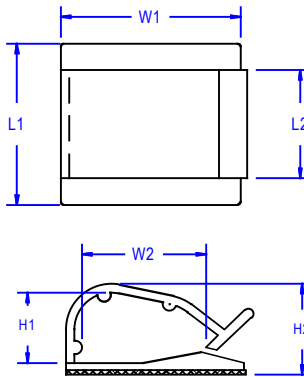

04-09-508



FURNISHED TWO UP ON DOUBLE ADHESIVE STRIP.
EASY LINER RELEASE.

ITEM NO.	L1		L2		W1 Ref.		W2 Ref.		H1 Ref.		H2 Ref.		Max Bundle DIA.	
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm
04-09-108	.58	14.6	.34	8.6	.64	15.3	.18	4.6	.17	4.3	.30	7.6	.16	4.06
04-09-208	.99	25.14	.50	12.7	.99	25.1	.45	11.4	.28	7.11	.47	11.9	.28	7.11
04-09-218	.75	19	.37	9.4	.74	18.8	.45	11.4	.28	7.11	.47	11.9	.28	7.11
04-09-308	.98	24.9	.49	12.4	1.0	25.4	.73	18.5	.52	13.2	.68	17.3	.53	13.46
04-09-408	1.10	27.9	.72	18.3	1.2	31	.91	23.1	.45	11.3	.62	15.7	.62	15.75
04-09-508	.62	15.5	.25	6.35	1.0	25.4	.46	11.6	.44	11.2	.59	15	.44	11.18

MATERIAL	NYLON 66
COLOR	NATURAL
ASTM	D 4066, PA0111
UL RATING	94V-2
UL FILE NO.	E70062
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	15

ADHESIVE	RUBBER BASE
CARRIER	POLYETHYLENE
THICKNESS	1/32
COLOR	WHITE
UL FILE NO.	MH15436
RoHS COMPLIANCE	YES
TEMPERATURE	32 to 167°F (0 to 75 °C)
MR NUMBER	10

ALL DIMENSIONS ARE FOR REFERENCE ONLY
PACKAGING: 500PER BAG
ADD SUFFIX (-BK) TO PART NUMBER FOR BLACK COLOR.

	Drwn. by: FL	Date: 07-31-06	ALL ELECTRONICS HARDWARE, INC. 92642 CORPORATE PARKWAY ALGONQUIN, ILLINOIS. 60102 847-658-1697	Title	CABLE CLIPS, MOLDED, 04-09 SERIES
Issue D	5-16-13	REV. D, added part NO. 04-09-218 Updated address.		File No.	04-09SERIES CAT