


06-06series

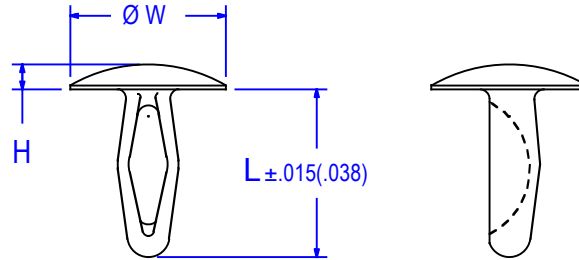

ITEM NO	Hole Dia. Range		Panel Thickness		L		W		H	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
06-06-105	.122-.126	3.1-3.2	.078-.098	2.0-2.5	.330	8.4	.280	7.1	.043	1.1
06-06-110	.182-.192	4.6-4.9	.062-.125	1.6-3.2	.400	9.1	.360	9.7	.060	1.5
06-06-140	.131-.141	3.3-3.6	.114-.157	2.9-4.0	.437	11.1	.406	10.3	.067	1.7
06-06-160	.151-.161	3.8-4.1	.062-.125	1.6-3.2	.390	9.9	.250	7.1	.040	1.0
06-06-187	.182-.192	4.6-4.9	.098-.157	2.5-4.0	.430	10.9	.500	12.7	.087	2.2
06-06-210	.182-.192	4.6-4.9	.165-.185	4.2-4.7	.525	13.3	.375	9.5	.060	1.5
06-06-230	.250-.260	6.4-6.6	.125-.187	3.2-4.8	.575	14.6	.484	12.3	.060	1.5
06-06-250	.250-.260	6.4-6.6	.125-.250	3.2-6.4	.630	16.0	.500	12.7	.050	1.3

PACKAGING : 1000 PER BAG

UL 94V-O MATERIAL AVAILABLE UPON REQUEST  
TO ORDER ADD SUFFIX "X" TO ITEM NUMBER

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E41938
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	12

					BY	DATE	Title MOUNTING BUTTON	
							Part No.	Issue
							See table	O
							Drwg. type	8-30-16
							Catalog	
No	Revision	Date	Init.				File No.	06-06series
								⊕

ALL ELECTRONICS HARDWARE INC.  
2642 Corporate Parkway  
Algonquin, IL. 60102 1-800-778-7234