


06 speed fastener series

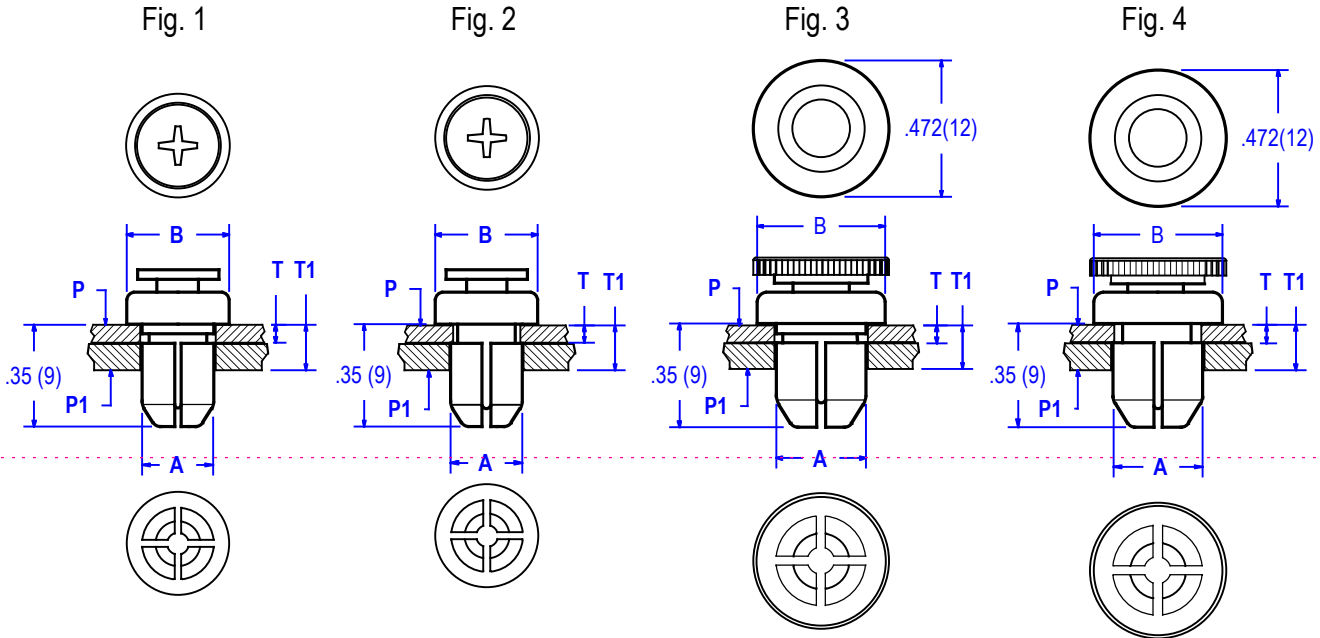

Type 1 - Fastener separates from both panels

Item No	A		B		Panel P Hole Dia.		Panel P1 Hole Dia.		Panel P thickness "T"		Total thickness "T1"		Fig.	Pull-out Force	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm		Lbs	Kg.
06-13-36	.248	6.3	.362	9.2	.250-.256	6.35-6.5	.250-.256	6.35-6.5	.004 < T < .079				1	66	30
06-13-79	.311	7.9	.425	10.8	.315-.322	8.0 - 8.2	.315-.322	8.0 - 8.2	0.1 < T < 2.0		.079 - .165 2 - 4.2		3	110	50
06-15-79	.311	7.9	.425	10.8	.315-.319	8.0 - 8.1	.315-.319	8.0 - 8.1					1	110	50

Type 2 - Fastener retained on panel P

Item No	A		B		Panel P Hole Dia.		Panel P1 Hole Dia.		Panel P thickness "T"		Total thickness "T1"		Fig.	Pull-out Force	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm		Lbs	Kg.
06-14-36	.248	6.3	.362	9.2	.236-.240	6.0 - 6.1	.250-.256	6.35-6.5					2	66	30
06-14-79	.311	7.9	.425	10.8	.295-.303	7.5 - 7.7	.315-.319	8.0 - 8.1	.063 1.6		.079 - .165 2 - 4.2		2	110	50
06-15F-79	.311	7.9	.425	10.8	.295-.303	7.5 - 7.7	.315-.319	8.0 - 8.1					4	110	50

**To Lock :** Push and turn operator clockwise  
**To Unlock:** Push and turn operator counter clockwise

PACKAGING : 1000 Pcs. per bag

Grommet's Material	
MATERIAL	POLYCARBONATE
UL RATING	UL94-V2
UL FILE NO.	E93278
COLOR	BLACK
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 230°F (-40 to 115°C)
MR NUMBER	57

Operator's Material	
MATERIAL	Nylon 66, 33% glass
UL RATING	UL94-HB
UL FILE NO.	E41938
COLOR	BLACK
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-422 to 284°F (-30 to 140°C)
MR NUMBER	58

					BY	DATE	Title SPEED FASTENER, 1/4 Turn Lock.	
							Part No. See Tables.	
							Issue O 10-17-16	
							Drwg. type Catalog	
							File No. 06-speed fastener series	
							ALL ELECTRONICS HARDWARE INC. 2642 Corporate Parkway Algonquin, IL. 60102 1-800-778-7234	
No	Revision	Date	Init.					