


09-13-95X TO-220 SPACER

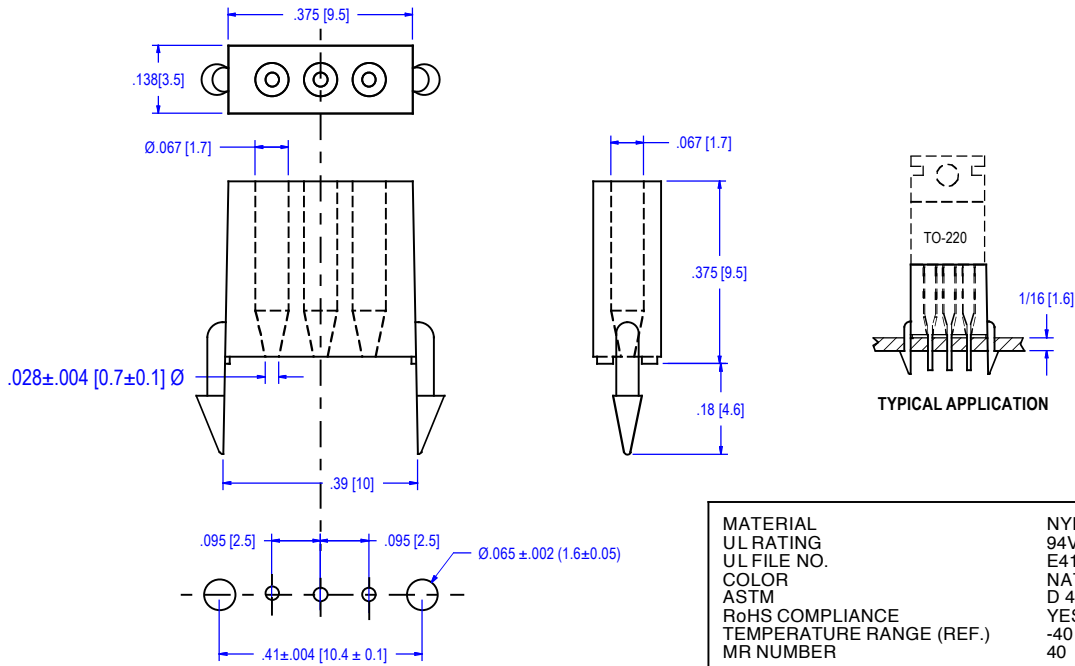


MATERIAL	NYLON 66
UL RATING	94V-0
UL FILE NO.	E41797
COLOR	NATURAL
ASTM	D 4066
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	40

PACKAGING : 1000 PER BAG

MOUNTING HOLES LAYOUT
1/6 [1.6] BOARD THICKNESS.

09-12-SERIES --- TRIACS TERMINAL SPACERS

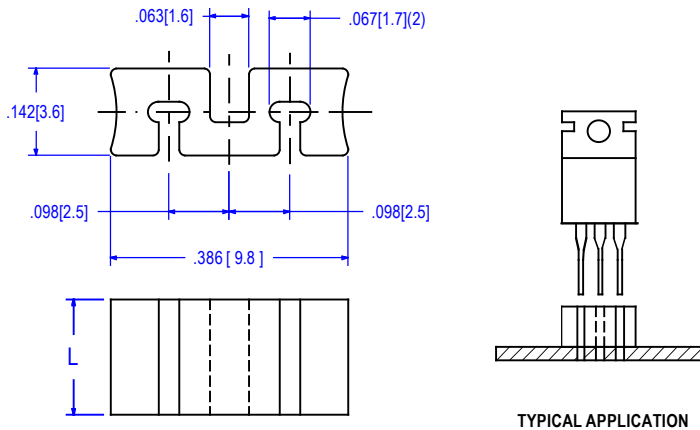

ITEM NO.	L	
	In. ±.006	mm. ± 0.15
09-12-30	.118	3
09-12-40	.157	4
09-12-50	.197	5
09-12-60	.236	6
09-12-70	.276	7
09-12-80	.315	8
09-12-90	.354	9
09-12-100	.394	10
09-12-110	.433	11
09-12-120	.472	12
09-12-130	.512	13
09-12-140	.551	14
09-12-150	.590	15

MATERIAL	SEPS (PS-Ethylene-PP- Styrene)
UL RATING	94V-0
UL FILE NO.	E58608
COLOR	Black
RoHS COMPLIANCE	Yes
TEMPERATURE RANGE (REF.)	-76 to 248°F (-60 to 120°C)
MR NUMBER	27

- NOTES:
1. COLOR: BLACK
 2. SUTABLE FOR SOLDER WAVE OPERATION.
NOT RECCOMENDED FOR SOLDER RE-FLOW.
 3. MAX. OPERATING TEMPERATURE = -76 to 248 °F (-60 to 120 °C)
 4. SHORT TERM TEMPERATURE PEAK (30 SEC.) = 284 °F (140 °C)
 5. PACKAGING = 1000 PCS. PER BAG.

				POWER TRANSISTOR SPACERS 09-12-XX & 09-13-95X			Issue
				Dimensions: Inches (mm)	Tolerance: .XX = ±.010 .XXX = .005	DRAWN BY FL	A
A	Changed material for 09-13-95X to MR-40	8-26-15	FL	ALL ELECTRONICS HARDWARE INC. 2642 Corporate Parkway Algonquin, IL. 60102 1 800 778 7234		Dwg. Type CATALOG	
No	Change	Date	Init	File No.	TriacsSpacer	08-26-15	