


02 SERIES

- Insulates terminals, wires
- UL temperature rating: 105°C
- CSA temperature rating: 90°C
- UL voltage: 600V
- CSA voltage: 300V

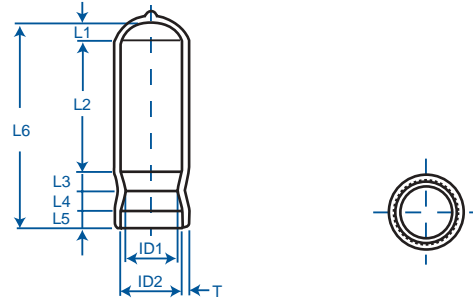

MATERIAL	PRODUCT
UL YELLOW CARD FILE #: E58538(S)	E55167(S)
CSA #:	— LR52853 & LR52854

ITEM NO. 10-02-Series	
COLOR:	Clear* <small>*Other colors available; inquiries welcome</small>
PACKAGING:	250/bag
MATERIAL:	Soft PVC

ITEM NO.	ID1		ID2		L1		L2		L3		L4		L5		L6		T							
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)						
10-02-10	.335	(8.5)	.394	(10.0)	.118	(3.0)	.827	(21.0)	.118	(3.0)	.118	(3.0)	.118	(3.0)	1.30	(33.0)								
10-02-20	.394	(10.0)	.472	(12.0)	.158	(4.0)	1.06	(27.0)	.177	(4.5)	.177	(4.5)	.158	(4.0)	1.73	(44.0)			.039	(1.0)				
10-02-30	.551	(14.0)	.630	(16.0)		1.54	(39.0)	.197	(5.0)	.197	(5.0)	.197	(5.0)	2.28	(58.0)					.047	(1.2)			
10-02-40	.669	(17.0)	.787	(20.0)	.236	(6.0)	1.93		(49.0)		.197		(5.0)		.197	(5.0)	2.76	(70.0)						.059
10-02-50	.866	(22.0)	.945	(24.0)	.276	(7.0)	1.89	(48.0)	.177	(4.5)		.177	(4.5)	3.15		(80.0)								
10-02-60	1.06	(27.0)	1.14	(29.0)		.531	(13.5)	1.63		(41.5)	.177		(4.5)		.177	(4.5)	3.15	(80.0)						
10-02-70	1.26	(32.0)	1.26	(32.0)	.787		(20.0)	1.81	(46.0)	.197		(5.0)	.197	(5.0)		.118		(3.0)	1.30	(33.0)				
10-02-80	1.38	(35.0)	1.57	(40.0)		.079	(2.0)	.709	(18.0)		.197	(5.0)		.197	(5.0)		.118	(3.0)	1.30	(33.0)				
10-02-90	.138	(3.5)	.236	(6.0)	.118		(3.0)	.669	(17.0)	.197		(5.0)	.197		(5.0)	.118		(3.0)	1.30	(33.0)				
10-02-100	.236	(6.0)	.315	(8.0)		.197	(5.0)	.591	(15.0)		.197	(5.0)		.197	(5.0)		.118	(3.0)	1.30	(33.0)				
10-02-110	.374	(9.5)	.472	(12.0)	.197		(5.0)	.591	(15.0)	.197		(5.0)	.197		(5.0)	.118		(3.0)	1.30	(33.0)				
Tolerance ±															.059		(1.5)							