


**85 SERIES  
86 SERIES**

- Fuse cover for D type subminiature connectors
- 10-85 series for pin plug connectors
- 10-86 series for pin receptacle connectors
- UL temperature rating: 105°
- UL voltage: 600V



MATERIAL	PRODUCT
UL YELLOW CARD FILE #: E58538(S)	E55167(S)

ITEM NO. 10-85-Series 10-86-Series	
<b>COLOR:</b>	Transparent Blue* <small>*Other colors available; inquiries welcome</small>
<b>PACKAGING:</b>	1000/bag
<b>MATERIAL:</b>	Soft PVC

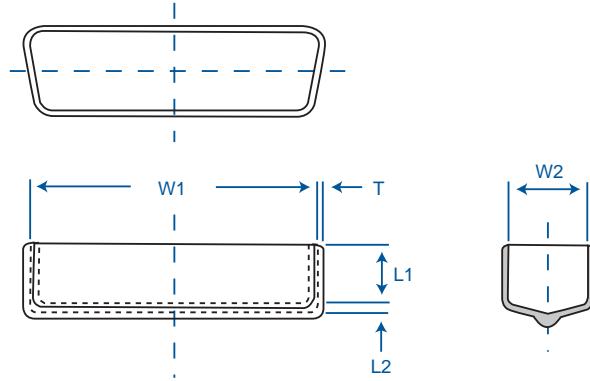

ITEM NO.	L1		L2		W1		W2		T	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
10-85-09					.646	(16.4)				
10-85-15			.059	(1.5)	.969	(24.6)				
10-85-25	.244	(6.2)			1.51	(38.3)	.307	(7.8)		.039
10-85-37					2.16	(54.8)				
10-85-50			.079	(2.0)	2.06	(52.4)	.417	(10.6)		
10-86-09					.697	(17.7)				
10-86-15	.236	(6.0)			1.02	(26.0)	.362	(9.2)		
10-86-25			.079	(2.0)	1.57	(40.0)	.370	(9.4)		.039
10-86-37	.232	(5.9)			2.23	(56.7)	.378	(9.6)		
10-86-50					2.13	(54.0)	.484	(12.3)		
Tolerance ±		.039	(1.0)			.020	(.5)			.016


**88 SERIES**

- Cap protects studs from chemicals, paints, the elements, etc.
- Flame retardant
- Flexible
- UL temperature rating: 100°



MATERIAL
UL YELLOW CARD FILE #: E58538(S)

ITEM NO. 10-88-Series	
<b>COLOR:</b>	Black
<b>PACKAGING:</b>	1000/bag
<b>MATERIAL:</b>	Soft PVC

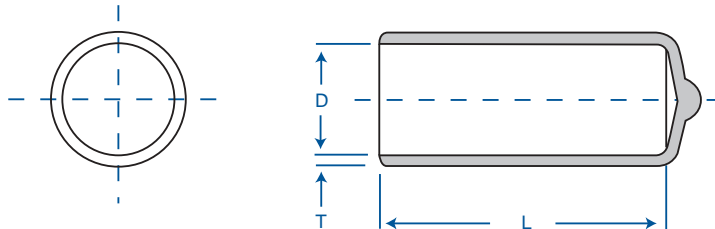

ITEM NO.	D Diameter		H		T	
	inches	(mm)	inches	(mm)	inches	(mm)
10-88-30	.110	(2.8)	1.18	(30.0)		
10-88-40	.150	(3.8)				
10-88-50	.189	(4.8)	1.57	(40.0)		.039
10-88-60	.224	(5.7)				
10-88-80	.303	(7.7)				
Tolerance ±				.039	(1.0)	