


MOUNTING HOLE DIA. = .156±.003 (4±0.08)
 PANEL THICKNESS = 1/16 (1.5)

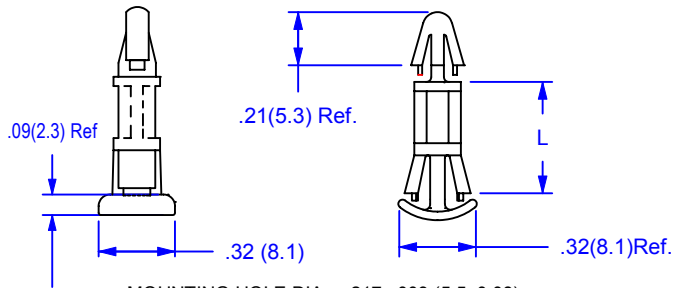


01-06

MOUNTING HOLE DIA. = .217±.003 (5.5±0.08)
 PANEL THICKNESS = .02 TO .039 (0.5-1.0)

ITEM NO.	L±.015 (0.38)	
	Inches	mm
01-06-50	.197	5
01-06-60	.236	6
01-06-80	.320	8
01-06-100	.394	10
01-06-120	.472	12
01-06-140	.551	14
01-06-160	.630	16
01-06-180	.709	18

PACKAGING = 500PCS PER BAG.

MOUNTING HOLE DIA. = 156±.003 (4±0.08)
 PANEL THICKNESS = 1/16 (1.5)

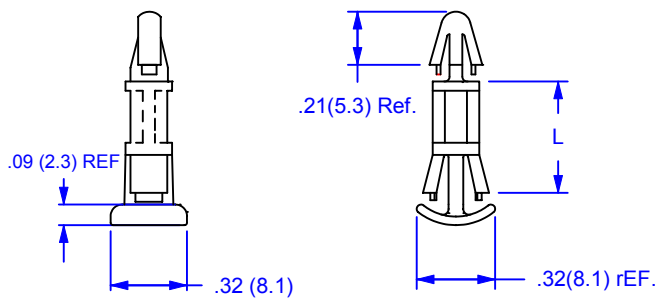

01-07

MOUNTING HOLE DIA. = .217±.003 (5.5± 0.08)
 PANEL THICKNESS = .047 TO .079 (1.2 - 2)

ITEM NO.	L ±.015 (0.38)	
	Inches	mm
01-07-50	.197	5
01-07-60	.236	6
01-07-80	.320	8
01-07-100	.394	10
01-07-120	.472	12
01-07-140	.551	14
01-07-160	.630	16
01-07-180	.709	18

PACKAGING = 500PCS PER BAG.

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E53664
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to185°F (-40 to 85°C)
MR NUMBER	05

V-0 RATED NYLON AVAILABLE ON REQUEST.
 TO ORDER ADD SUFFIX " X" TO PART NUMBER

				ALL ELECTRONICS HARDWARE , INC. 90 NORTH LIVELY BLVD. ELK GROVE VILLAGE, ILLINOIS 60007-1317 TEL.1-800-778-7234	REVERSECBS File No. REVCBSCAT2	10-17-05
No	Revision	Date	Init.			