


ITEM NUMBER	THREAD SIZE T	DIMENSION L 1 mm increments	L1	L2	D
07-57-L-TYPE	M2	15 to 50			6.4
07-58-L-TYPE	M2.5	15 to 50	6	6	6.4
07-59-L-TYPE	M3	15 to 50			6.4
07-60-L-TYPE	M4	15 to 75			8
07-61-L-TYPE	M5	20 to 75	10	10	9.5
07-62-L-TYPE	M6	20 to 75	12.7	12.7	12.7

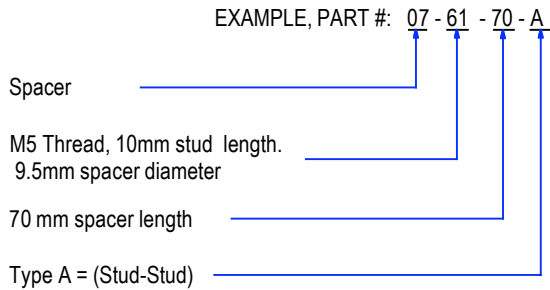

NOTES

1. THREADED INSERTS MATERIAL : BRASS
2. MAX. UNTHREADED LEGTH : 1.5 THREAD
3. PACKAGING: 100 PCS/BAG

SPACER MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E41938
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	12

No	Revision	Date	Init.	BY	DATE	Title	Part No.	Issue
						SPACER, HEAVY DUTY THREADED.	SEE CHART	0
						Part No.	SEE CHART	Issue
						DIMENSIONS	inches mm	Tolerance .xx = ± 0.38
						ALL ELECTRONICS HARDWARE INC. 2642 Corporate Parkway Algonquin, IL. 60102 1-800-778-7234	Drwg. type CATALOG	06/17/09
							File No. threadedspacers	