


HEAT STABILIZED CABLE TIES

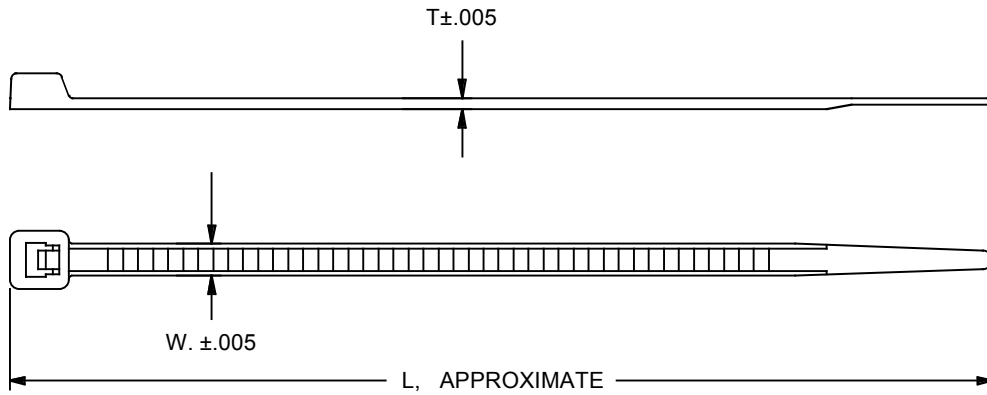

AEH ITEM NO.	LOOP TENSILE		W ± .005 (0.12)		T ± .005 (0.12)		L, (aproxm.)		PACKAGING PCS / BAG
	Lbs	Kg.	Inches	mm	Inches	mm	Inches	mm	
02-00-418-HS	18	8.2	.095	2.4	.042	1.07	4.1	104	1000
02-00-618-HS							6.2	157	1000
02-00-818-HS							8.2	208	1000
02-07-540-HS	40	18.2	.140	3.56	.049	1.24	5.8	147	1000
02-07-840-HS							8.8	223	1000
02-07-1140-HS							11.0	279	100
02-07-1440-HS							14.25	362	100
02-02-750-HS	50	22.7	.180	4.57	.052	1.32	7.5	190	1000
02-02-1150-HS							11.25	286	1000
02-02-1450-HS							14.25	362	1000
02-03-8120-HS	120	54.4	.300	7.62	.076	1.93	8.7	221	100
02-03-15120-HS							15.1	383	100

MATERIAL	NYLON 66 Heat stabilized
UL RATING	UL94-V2
UL FILE NO.	E70062
COLOR	BLACK
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 257°F (-40 to 125°C)
MR NUMBER	56

				Drwn. by:	Name	Date	Title CABLE TIES. HEAT STABILIZED.			
					FL	05-26-13				
				Unit:	INCHES (mm)		Part No. SEE TABLE			
				Tolerance (unless noted) .XXX=.005 .XX=.010						
D	Corrected temperature range	04-20-20	FL	ALL ELECTRONICS HARDWARE 2642 CORPORATE PARKWAY ALGONQUIN, IL 60102 847 658 1697.			Issue D			
C	Replaced note with MR56	09-06-16	FL				Dwg. type Catalog		09-20-20	
B	Re-worded material note	7-31-13	FL				File No. cableties heatstabl			
No	Revision	Date	Init.							